


FINISH BITUMINOUS SURFACE  
1/4" ABOVE GUTTER FLAG

DEPRESSED SECTION AT  
INLET TAPER FROM 10'-0"  
EACH WAY

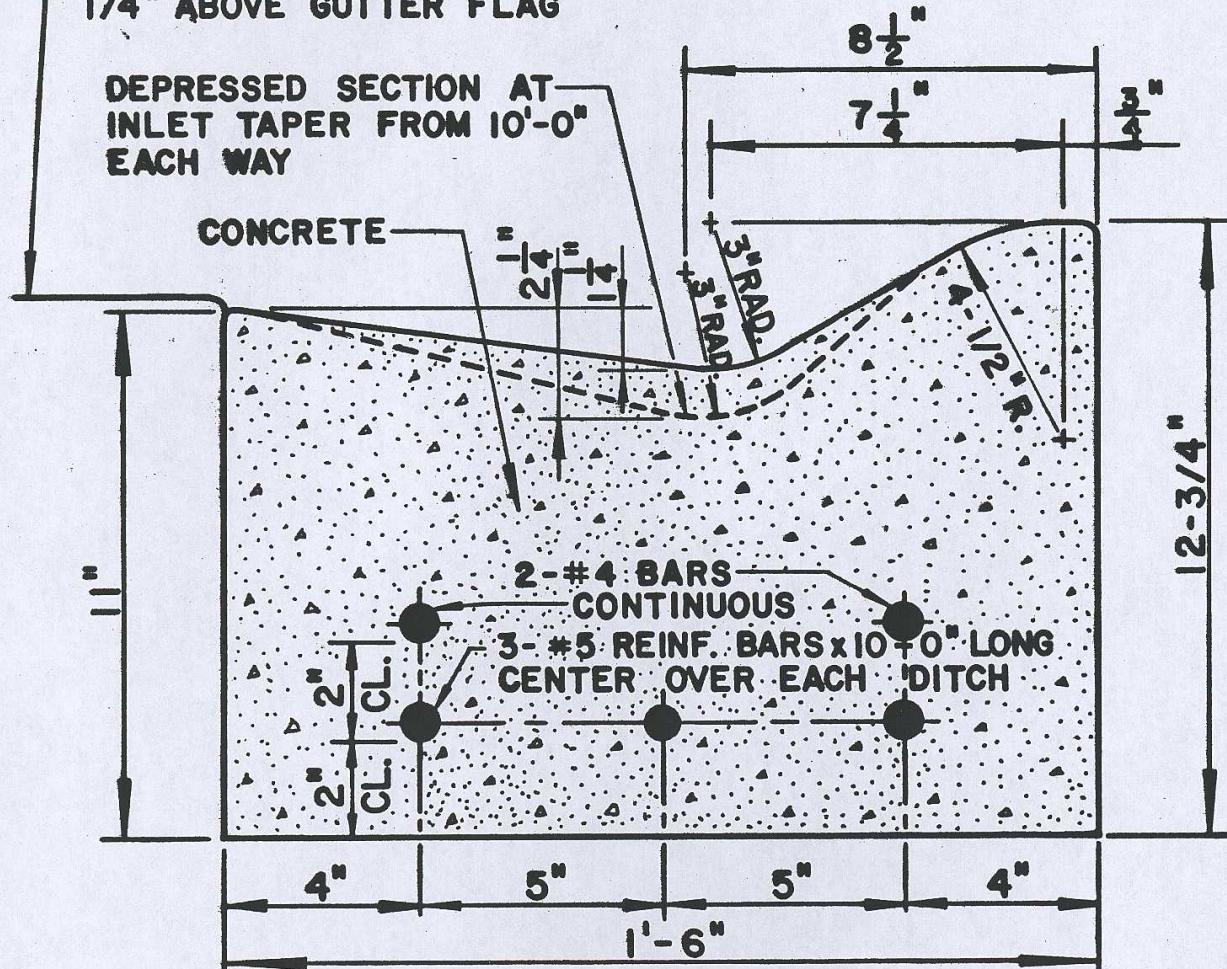

## TYPE "A" CURB AND GUTTER

SCALE: 1" = 4"

### NOTES:

1. REFERRED SECTIONS ARE TO "STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION, STATE OF ILLINOIS."
2. CURB AND GUTTER TO HAVE BROOM FINISH ALL EXPOSED CORNERS TO BE EDGED.
3. CURB AND GUTTER TO HAVE EXPANSION JOINTS WITH DOWEL BARS EVERY 30 FT. DOWEL BARS TO BE 6 X 24 INCHES LONG WITH ONE END CAPPED WITH 5" METAL SLEEVES.
4. CURB AND GUTTER TO HAVE CONTRACTION JOINTS EVERY 15 FT.
5. ALL CURB RETURN RADII TO BE 25' UNLESS OTHERWISE NOTED.
6. PROVIDE A MINIMUM OF A 2 INCH GRAVEL BED UNDER THE CURB AND GUTTER.